


## Exterior Mount Product Specifications

Code: OWV-MONO

160 micron white/black composite PVC with clear removable acrylic pressure-sensitive adhesive and an unperforated solid PE coated release liner.

Applications	Windows, glass doors or other transparent surfaces for short-term POP, retail window graphics or similar applications. Not recommended for long-term or large-scale applications (e.g., building wraps).
Composition	White/black composite PVC with clear pressure-sensitive adhesive and an unperforated solid PE coated release liner.
Open Area	40%, approx.
Vinyl Thickness (incl. adhesive)	160 microns, approx.
Release Liner Thickness	150 microns, approx.
Adhesive Thickness	20 microns, approx.
Perforation Diameter	1.5 mm, approx.
Standard Widths/Lengths	1370mm x 50m roll (1520mm x 50m roll size available by special order).
Dimensional Stability	Fair
Minimum Application Temperature	5° C
Service Temperature Range	-7° C to 100° C
Expected Lifetime Exterior	Up to 2 years; 6 months for clean removal. Adhesion may increase with time. Testing recommended before production to determine suitability of product for intended application.
Water Resistance	Fair. Immersion in water not recommended. If exposed to rain, an optically clear, compatible overlamine can be used to prevent holes from filling with water.
Humidity Resistance	Fair
Solvent Resistance	Fair
Storage Stability	1-2 years shelf life when stored at 21° C and 50% relative humidity
Colors Available	White on print side and black on adhesive side.
Printing	Multiple vinyl inks. Print image on white (non-adhesive) side, not on the release liner. Compatible with screen printing; inkjet printing using solvent, eco-solvent, mild solvent, UV curable and latex inks; thermal transfer; electrostatic transfer; and airbrushing.
Installation	Apply to clean, dry glass surface. Use plain soap and water, rinse and dry glass well. Do NOT use ammonia, or other solvent-based glass cleaners prior to application.
Removal	Remove by peeling from surface. Remove adhesive residue on older installations, if necessary.

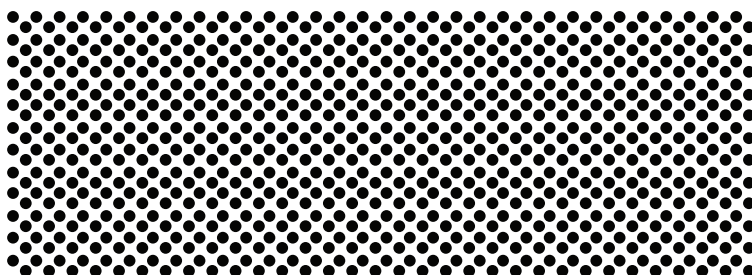

SIGNrite™ ONE WAY VISION MONOMERIC WINDOW FILM